

HUMIDITY SEPARATORS S30

DESCRIPTION

The ADCA S30 series baffle separators remove moisture from steam and compressed air pipelines. Steam or compressed air pass through the separator and, as a result of expansion, impact and swirling effects, the particles with a heavier specific gravity, such as water and oil droplets, moisture in suspension, dirt and scale, are separated from the fluid.

The condensate collected at the bottom of the separator is automatically drained by a suitable steam or compressed air trap, which is supplied separately.

MAIN FEATURES

Several possibilities of installation.

No moving parts.

Maintenance-free design.

OPTIONS: Flanged condensate connection.
Stainless steel construction.

USE: Steam, compressed air and other gases.

AVAILABLE MODELS: S30/S – carbon steel, baffle design.

SIZES: 1/2" to 12"; DN 15 to DN 300.

CONNECTIONS: Flanged EN 1092-1 PN 16 or PN 40.
Flanged ASME B16.5 Class 150 or 300.
Female threaded ISO 7 Rp or NPT on request.

INSTALLATION: Always with the condensate discharge pointing downwards.
See IMI – Installation and maintenance instructions.




CE MARKING – GROUP 2 (PED – European Directive)

PN 16	Category	PN 40	Category
1/2" to 1" – DN 15 to 25	SEP	1/2" to 1" – DN 15 to 25	1 (CE marked)
1 1/4" to 2" – DN 32 to 50	1 (CE marked)	1 1/4" to 3" – DN 32 to 80	2 (CE marked)
2 1/2" to 4" – DN 65 to 100	2 (CE marked)	4" and 5" – DN 100 and 125	3 (CE marked)
5" to 8" – DN 125 to 200	3 (CE marked)	6" to 12" – DN 150 to 300	4 (CE marked)
10" and 12" – DN 250 and 300	4 (CE marked)	–	–

BODY LIMITING CONDITIONS *

FLANGED PN 16		FLANGED CLASS 150		FLANGED PN 40 / CLASS 300	
ALLOW. PRESSURE	RELATED TEMP.	ALLOW. PRESSURE	RELATED TEMP.	ALLOW. PRESSURE	RELATED TEMP.
16 bar	50 °C	16 bar	50 °C	40 bar	50 °C
14 bar	100 °C	14 bar	100 °C	37 bar	100 °C
13 bar **	195 °C	13 bar **	195 °C	31 bar **	239 °C
12 bar	250 °C	–	–	27 bar	300 °C

* Rating according to EN 1092-1:2018; ** PMO – Maximum operating pressure for saturated steam.
Minimum operating temperature: -10 °C; Design code: AD-Merkblatt.

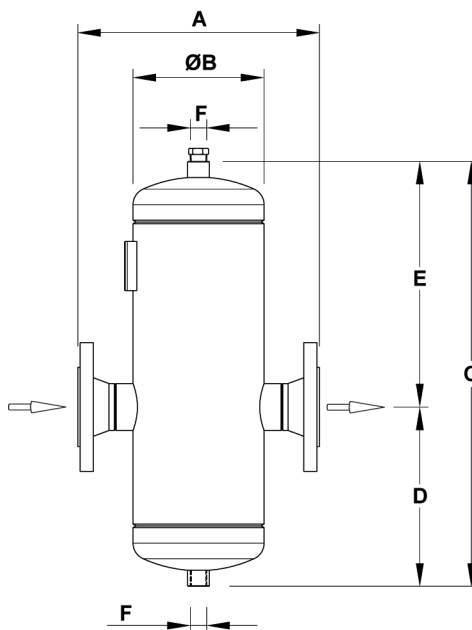

DIMENSIONS (mm) *

SIZE	PN 16	PN 40	CLASS 150	CLASS 300	ØB	C	D	E	F **	VOLUME (L)	WEIGHT (kg)
	A	A	A	A							
1/2" – DN 15	230	230	250	259	114	360	150	210	1/2"	2,7	6,3
3/4" – DN 20	230	230	255	264	114	360	150	210	1/2"	2,7	6,9
1" – DN 25	230	230	262	274	114	360	150	210	1/2"	2,8	7,3
1 1/4" – DN 32	260	260	290	303	140	435	190	245	1/2"	5,1	12
1 1/2" – DN 40	260	260	294	307	140	475	210	265	1/2"	5,7	13,3
2" – DN 50	310	310	341	354	168	545	230	315	1/2"	9,8	19
2 1/2" – DN 65	380	394	430	442	219	590	260	330	3/4"	17,9	30,8
3" – DN 80	400	416	440	459	219	650	310	340	3/4"	20	35
4" – DN 100	470	490	520	530	273	755	320	435	3/4"	37,6	49,6
5" – DN 125	535	561	605	622	324	895	370	515	1"	62,8	75,4
6" – DN 150	565	605	633	652	356	1010	420	580	1"	86,2	101,2
8" – DN 200	605	650	685	700	406	1220	470	740	1"	139	158,7
10" – DN 250	720	790	784	815	508	1590	630	950	1 1/2"	283	301
12" – DN 300	860	914	933	964	610	1750	760	980	1 1/2"	452	433,9

* For certified values, consult manufacturer. Volume and weight refer to PN 16 version. Other versions may have slightly different values.

** As standard, in units manufactured with EN 1092-1 flanges, the drain connection is female threaded ISO 7 Rp. In models with ASME B16.5 flanges, this connection is female threaded NPT. Alternatively, EN 1092-1 or ASME B16.5 flanged drain connections can be supplied (ASME on the same class as main connections).

Remarks: The top of the separator is supplied with a threaded connection, which size does not exceed the size of the drain connection. This connection is always supplied with a threaded socket. It can be used for air venting or balance pipe connection.

MATERIALS

DESIGNATION	MATERIAL
Body	P235GH / 1.0325
Head	P265GH / 1.0425
Inlet / outlet pipe	P235GH / 1.0325
EN flange	P250GH / 1.0460
ASME flange	ASTM A105 / 1.0432
Socket	ASTM A105 / 1.0432
Internals	S235JR / 1.0038

FLANGE CONNECTIONS

RATING	SIZE	EN STANDARD	ASME STANDARD
PN 16	1/2" to 2" DN 15 to 50 *	EN 1092-1 PN 40	ASME B16.5 Class 150
PN 16	2 1/2" to 12" DN 65 to 300	EN 1092-1 PN 16	ASME B16.5 Class 150
PN 40	1/2" to 12" DN 15 to 300	EN 1092-1 PN 40	ASME B16.5 Class 300

* Flanges EN 1092-1 PN 16 and PN 40, from DN 15 to DN 50, have the same number and size of holes.