

## TWO-WAY GLOBE CONTROL VALVES V16/2 (EN)

### DESCRIPTION

The ADCATrol V16/2 is a series of single seated, two-way globe control valves designed for simple process engineering and industrial applications with non-critical operating conditions. These valves can be assembled with pneumatic, hydraulic or electric actuators, for modulating and shut-off control tasks.

### MAIN FEATURES

Compact and cost-effective.  
Modular design to meet process requirements.  
Stem guided (up to DN 50) and post guided (from DN 65 to DN 100).  
Parabolic plug design.  
Stainless steel trim.

### OPTIONS AND ACCESSORIES:

Bonnet extension for high and low temperatures.  
Various stem sealing options including bellows sealing.  
Soft or stellite valve sealing.  
Reduced bore trims.  
Silencers.

### USE:

Saturated and superheated steam.  
Hot and superheated water.  
Air, gases and others.

### AVAILABLE MODELS:

V16/2G – SG iron.  
V16/2S – carbon steel.  
V16/2i – stainless steel.

### SIZES:

DN 15 to DN 100.

### CONNECTIONS:

V16/2G – Flanged EN 1092-2 PN 16.  
V16/2S and V16/2i – Flanged EN 1092-1 PN 16 or PN 40.  
Standard PN 16 DN 65 flanges are supplied with 4 holes. 8 holes, according to EN 1092-1/-2, on request.










CE MARKING – GROUP 2 (PED – EUROPEAN DIRECTIVE)		
PN 16	PN 40	CATEGORY
DN 15 to 50	DN 15 to 32	SEP
DN 65 to 100	DN 40 to 100	1 (CE marked)

BODY LIMITING CONDITIONS									
V16/2G **		V16/2S *				V16/2i *			
FLANGED PN 16		FLANGED PN 16		FLANGED PN 40		FLANGED PN 16		FLANGED PN 40	
ALLOW. PRESSURE	RELATED TEMP.	ALLOW. PRESSURE	RELATED TEMP.	ALLOW. PRESSURE	RELATED TEMP.	ALLOW. PRESSURE	RELATED TEMP.	ALLOW. PRESSURE	RELATED TEMP.
16 bar	-10 / 50 °C	16 bar	-10 / 50 °C	40 bar	-10 / 50 °C	16 bar	-10 / 50 °C	40 bar	-10 / 50 °C
14,7 bar	200 °C	13,3 bar	200 °C	33,3 bar	200 °C	13,4 bar	200 °C	33,7 bar	200 °C
13,9 bar	250 °C	12,1 bar	250 °C	27,6 bar	300 °C	12,7 bar	250 °C	29,7 bar	300 °C
12,8 bar	300 °C	11 bar	300 °C	25,7 bar	350 °C	11,8 bar	300 °C	28,5 bar	350 °C
11,2 bar	350 °C	10,2 bar	350 °C	23,8 bar	400 °C	11,4 bar	350 °C	27,4 bar	400 °C

\* Rating according to EN 1092-1:2018; \*\* Rating according to EN 1092-2:2007.

BONNET DESIGN	
STANDARD	EXTENDED
 <p>-10 to 250 °C</p>	 <p>Above 250 °C</p>

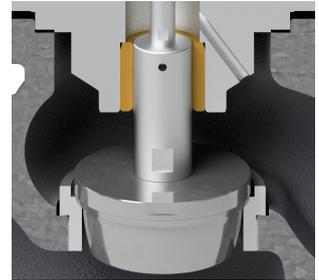TRIM DESIGN
UNBALANCED TRIM

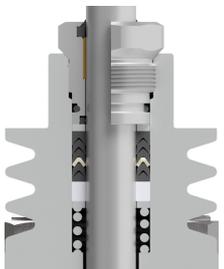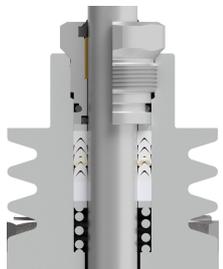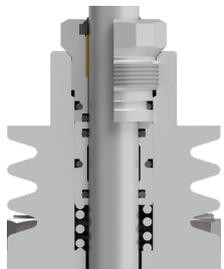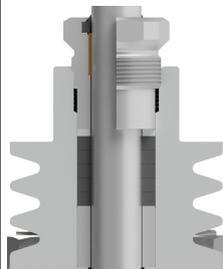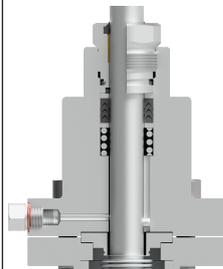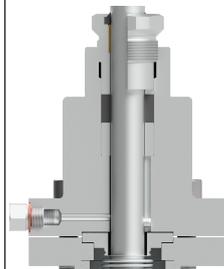
STEM SEALING					
PTFE/GR V-RINGS (V1.2)	PTFE V-RINGS (V2.2)	EPDM (EP1)	GRAPHITE (G1)	BELLOWS	
				(BV1)	(BG1)
 <p>-10 to 220 °C</p>	 <p>-10 to 180 °C</p>	 <p>-10 to 150 °C *</p>	 <p>-10 to 400 °C</p>	 <p>- 60 to 220 °C **</p>	 <p>- 60 to 400 °C **</p>


\* Up to 180 °C in steam and hot water applications.

\*\* Maximum operating pressure: 25 bar.

PLUG DESIGN	
PARABOLIC	PARABOLIC (SOFT SEALING)
 <p><b>Sealing:</b> Metal to metal <b>Characteristic:</b> Equal percentage (EQP) or linear (PL) <b>Flow direction:</b> From below <b>Rangeability:</b> 50:1 (EQP) or 30:1 (PL) <b>Leakage:</b> Class IV, acc. to IEC 60534-4</p>	 <p><b>Sealing:</b> PTFE/GR <b>Characteristic:</b> Equal percentage (EQP) or linear (PL) <b>Flow direction:</b> From below <b>Rangeability:</b> 50:1 (EQP) or 30:1 (PL) <b>Leakage:</b> Class VI, acc. to IEC 60534-4 <b>Max. temp.:</b> 200 °C</p>

FLOW RATE COEFFICIENTS – PARABOLIC PL AND EQP PLUGS												
SIZE	Kvs (m³/h)											
	2,1	2,7	4	6,3	10	16	25	40	63	100	160	
DN 15	•	•	•									
DN 20	•	•	•	•								
DN 25	•	•	•	•	•							
DN 32			•	•	•	•						
DN 40				•	•	•	•					
DN 50					•	•	•	•				
DN 65						•	•	•	•			
DN 80							•	•	•	•		
DN 100								•	•	•	•	
SEAT Ø (mm)	12		15	19,2	25	32	38	48	65	76	96	
STROKE (mm)	20								30			

For conversion Kvs = Cv (US) x 0,865.

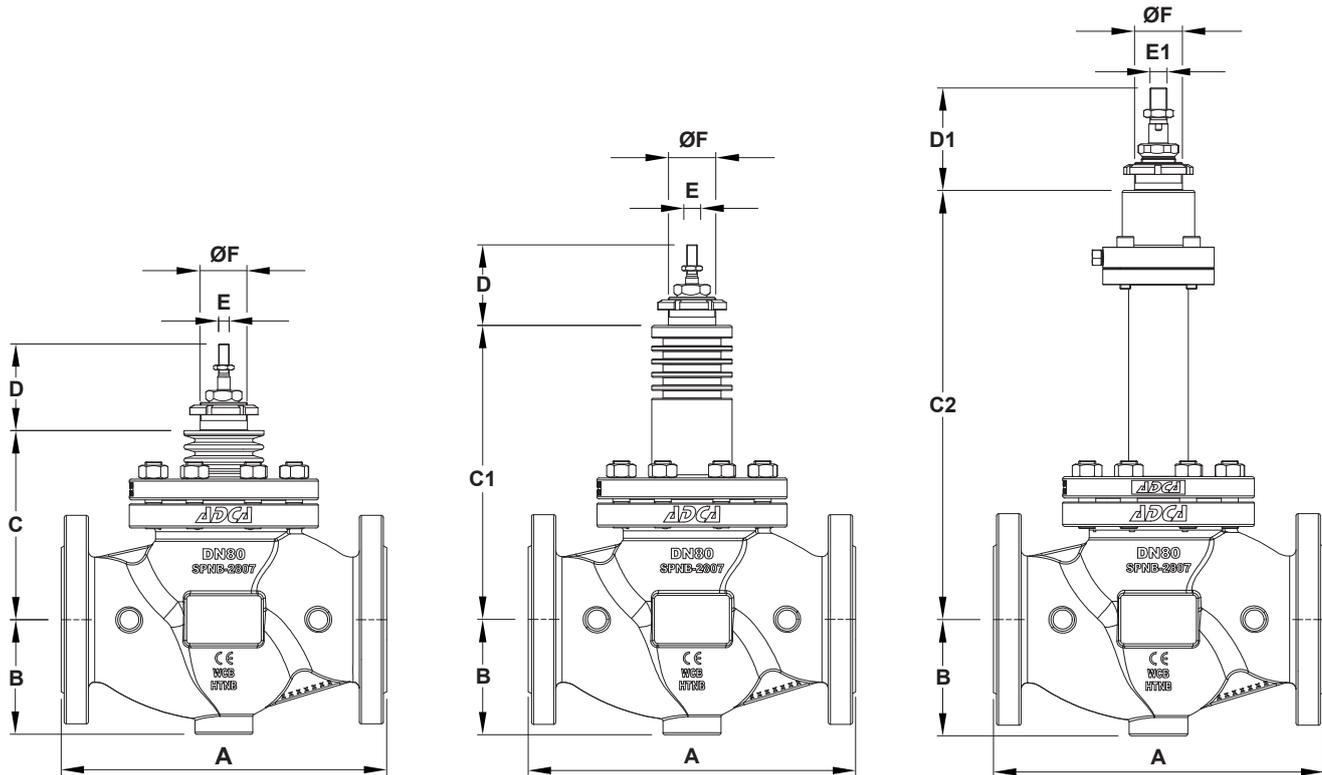

Valve with standard bonnet

Valve with extended bonnet


Bellows sealed valve

DIMENSIONS (mm)										
DIMENSIONS	SIZE									
	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100	
A	130	150	160	180	200	230	290	310	350	
B	52	53	58	70	75	85	100	110	130	
C	104	104	109	109	113	125	176	182	194	
C1	169	169	189	189	193	204	276	282	314	
C2	295	295	298	298	303	303	415	421	424	
D	77						82			
D1	77						92			
E	M10 x 1									
E1	M10 x 1						M16 x 1,5			
ØF	M40 x 1,5						M45 x 1,5			

Remarks: Standard PN 16 DN 65 flanges are supplied with 4 holes. 8 holes, according to EN 1092-1/-2, on request.

WEIGHTS (kg)									
OPTIONS	SIZE								
	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100
STANDARD	5,1	6	6,9	10	12,6	16,4	31,8	38,2	50,6
EXTENDED	5,8	6,7	7,6	10,9	13,9	17,6	32,5	38,9	51,1
BELLOWS	9,3	10,2	10,9	14,1	16,6	20,2	35,6	41,9	53,5

MAXIMUM PERMISSIBLE ACTUATING THRUSTS (kN)									
MAX. THRUST	SIZE								
	DN 15	DN 20	DN 25	DN 32	DN 40	DN 50	DN 65	DN 80	DN 100
	12								

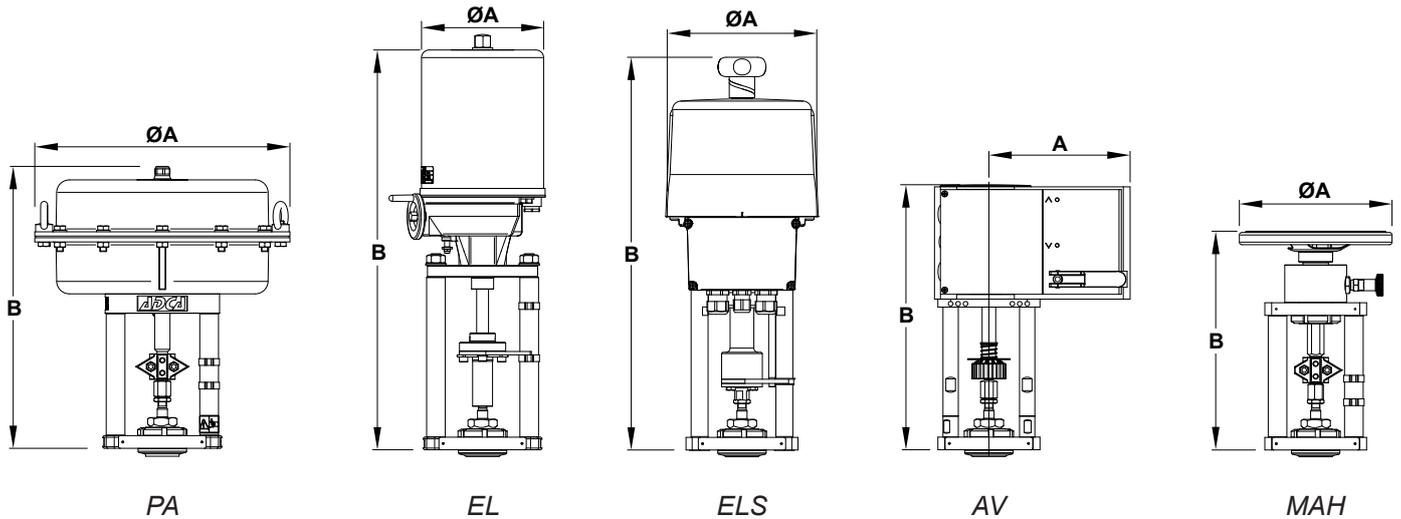

**DIMENSIONS – PA SERIES PNEUMATIC ACTUATORS (mm)**

DIMENSION	PA10	PA25	PA40	PA80
ØA	170	250	300	405
B	251	260	325 / 360	505 / 515 / 545
WEIGHT (kg)	6,3	10,1	18,7 / 19,2	50,4 / 55,4 / 59,3

For more information, please consult IS PA.010 – PA Linear pneumatic actuators.

**DIMENSIONS – EL SERIES ELECTRIC ACTUATORS (mm)**

DIMENSION	EL12	EL20	EL45	EL80	EL120
ØA	129	148	148	188	188
B	315	474	474	572	572
WEIGHT (kg)	2,1	8	8	13	13

For more information, please consult IS EL.012 – EL Linear electric actuators.

**DIMENSIONS – ELS SERIES ELECTRIC ACTUATORS (mm)**

DIMENSION	ELS20	ELS45	ELS80	ELS100	ELS140
ØA	180	180	180	180	180
B	503 / 530	503 / 530	540 / 570	540 / 570	615 / 635
WEIGHT (kg)	4,5	4,5	7,2	7,2	8

For more information, please consult IS ELS.020 – ELS Linear electric actuators.

**DIMENSIONS – AV SERIES ELECTRIC ACTUATORS (mm)**

DIMENSION	AVM234S	AVF234S
A	166	166
B	314	314
WEIGHT (kg)	4,1	4,1



For more information, please consult IS AVM.010 – AVM234S-AVF234S Linear electric actuators.

**DIMENSIONS – MAH SERIES MANUAL OPERATED ACTUATORS (mm)**


DIMENSION	MAH180
ØA	180
B	260
WEIGHT (kg)	4,8

For more information, please consult IS MAH.010 – MAH Manual operated linear actuators.


MATERIALS

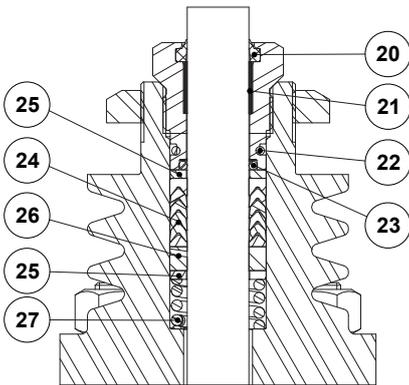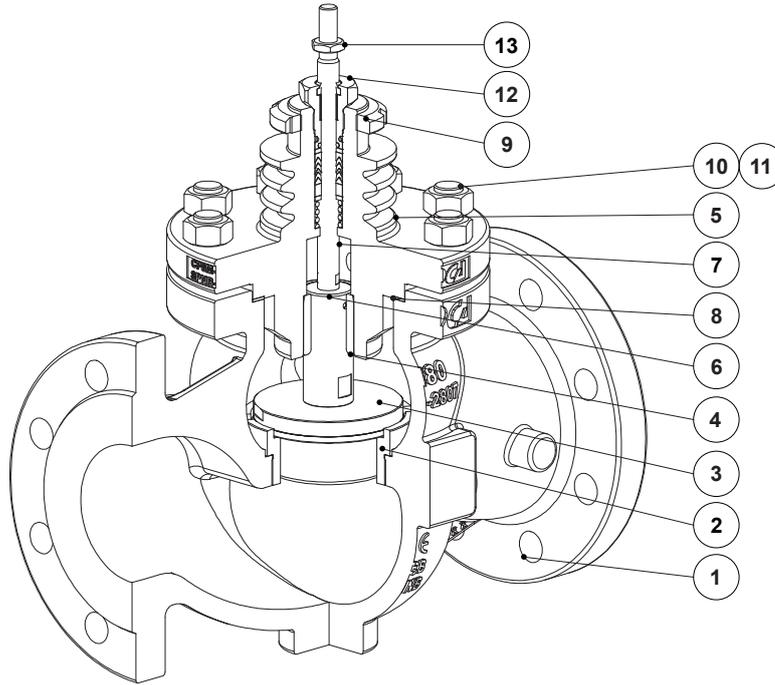


PTFE/GR V-Rings  
(V1.2)

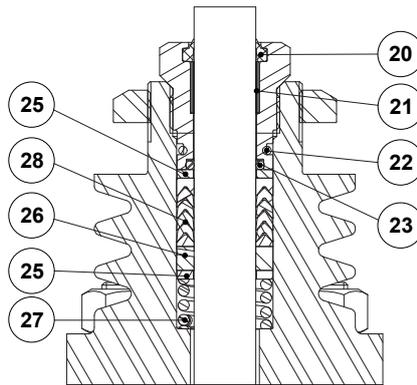


PTFE V-Rings  
(V2.2)

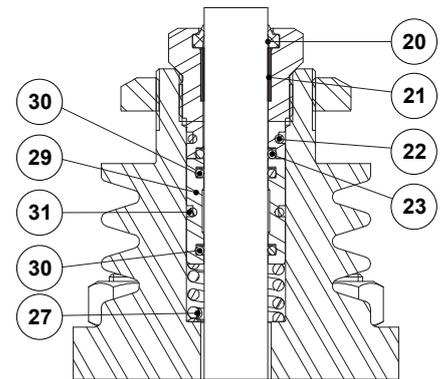


EPDM  
(EP1)

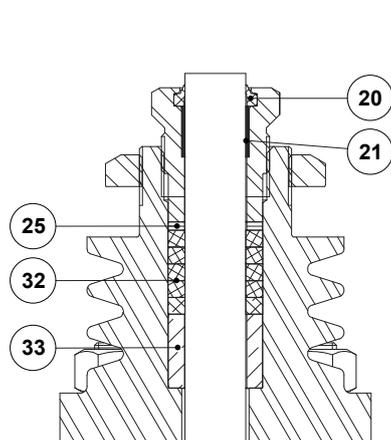

Graphite  
(G1)

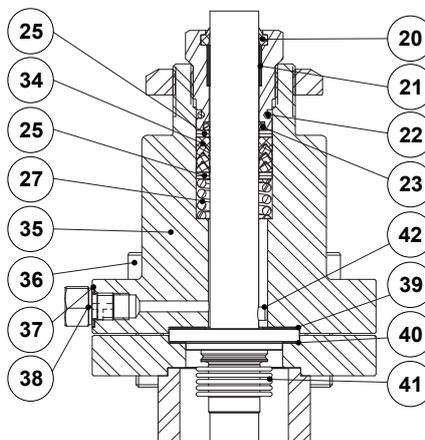

Bellows sealing  
(BV1)

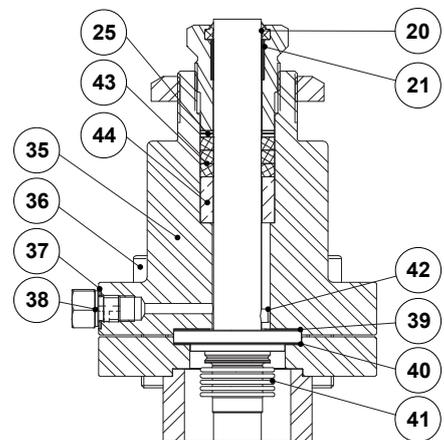

Bellows sealing  
(BG1)

**MATERIALS**

POS. No.	DESIGNATION	MATERIAL
1	Valve body (V16/2G)	GJS-400-15 / 0.7040
	Valve body (V16/2S)	A216 WCB / 1.0619
	Valve body (V16/2i)	A351 CF8M / 1.4408
2	* Seat	AISI 316L / 1.4404
3	* Valve plug	AISI 316L / 1.4404
4	Lower stem guide	** Bronze CB1
5	Bonnet (V16/2G and V16/2S)	A351 CF8M / 1.4408; A216 WCB / 1.0619
	Bonnet (V16/2i)	A351 CF8M / 1.4408
6	* Post stem (DN 65 to DN 100)	AISI 316L / 1.4404
7	* Stem	AISI 316L / 1.4404
8	* Gasket	Stainless steel / Graphite
9	Lock nut	A351 CF8 / 1.4308
10	Nut (V16/2G and V16/2S)	EN 10269 steel
	Nut (V16/2i)	Stainless steel A2-70
11	Stud (V16/2G and V16/2S)	EN 10269 steel
	Stud (V16/2i)	Stainless steel A2-70
12	* Packing nut	AISI 303 / 1.4305
13	Lock nut	AISI 304 / 4.4301
20	* Scraper ring	FPM; NBR
21	* Plain bearing	Bronze / PTFE
22	* O-ring	EPDM
23	* O-ring	FPM
24	* Chevron packing set	PTFE; Graphite filled PTFE
25	Washer	AISI 304 / 1.4301
26	* Stem guide	Stainless steel filled PTFE
27	* Spring	AISI 302 / 1.4310
28	* Chevron packing set	PTFE
29	O-ring guide	AISI 304 / 1.4301
30	* O-ring	EPDM
31	* O-ring	EPDM
32	* Packing set	Expanded graphite
33	Packing spacer	AISI 304 / 1.4301
34	* Safety packing set	Graphite filled PTFE
35	Bellows bonnet (V16/2G and V16/2S)	A105 / 1.0432; AISI 316 / 1.4401
	Bellows bonnet (V16/2i)	AISI 316 / 1.4401
36	Bolt or stud and nut (V16/2G and V16/2S)	EN 10269 steel
	Bolt or stud and nut (V16/2i)	Stainless steel A2-70
37	Gasket	Copper
38	Plug	AISI 316 / 1.4401
39	* Gasket	Stainless steel / Graphite
40	* Gasket	Stainless steel / Graphite
41	* Metal bellows	AISI 316Ti / 1.4571
42	* Locking pin	AISI 303 / 1.4305
43	* Safety packing set	Expanded graphite
44	Packing spacer	AISI 304 / 1.4301

\* Available spare parts.

\*\* Can be produced in PEEK (Tmax. 250 °C) on request.

ORDERING CODES V16/2 (a)													
VALVE MODEL	V1	2	G	S	1	U	1	1	1	E	FD	L	015
V16/2 – Globe control valve, two-way, straight body	V1												
VALVE SERIES													
Series 2		2											
BODY MATERIAL													
GJS-400-15 / 0.7040 SG iron			G										
A216 WCB / 1.0619 carbon steel			S										
A351 CF8M / 1.4408 stainless steel			I										
BONNET DESIGN													
Standard			S										
Extended			E										
TRIM DESIGN													
Unbalanced trim					1								
FLOW DIRECTION													
Flow under the plug						U							
Flow over the plug						O							
STEM SEALING													
PTFE/GR V-Rings (V1.2)							1						
Virgin PTFE V-Rings (V2.2)							2						
Graphite (G1)							3						
EPDM (EP1)							4						
Stainless steel bellows with PTFE/GR safety packing (BV1)							8						
Stainless steel bellows with graphite safety packing (BG1)							9						
PLUG DESIGN													
Parabolic								1					
VALVE SEALING													
Metal to metal (class IV)									1				
Soft sealed with PTFE/GR (class VI)									3				
Stellited seat and plug (class IV)									4				
Stellited seat (class IV)									5				
CHARACTERISTIC													
Equal percentage (EQP)										E			
Linear (PL)										L			
FLOW RATE COEFFICIENT													
Kvs 4											FD		
See table below for other Kvs value codes													
PIPE CONNECTIONS													
Flanged EN 1092-1/-2 PN 16												L	
Flanged EN 1092-1 PN 40												N	
SIZE													
DN 15													015
DN 20													020
...													
SPECIAL CONSTRUCTION / ADDITIONAL OPTIONS													
A full description must to be provided and validated in case of a non-standard construction													E

(a) Codification for valve only. For actuator codes, refer to the appropriate information sheet.

FLOW RATE COEFFICIENT CODES											
Kvs	2,1	2,7	4	6,3	10	16	25	40	63	100	160
Code	R2	R1	FD	FE	FF	FG	FH	FI	FJ	FL	FM