

## SANITARY PRESSURE GAUGES SMAN-63

### DESCRIPTION

The ADCAPure SMAN-63 are reliable general purpose sanitary bourdon tube pressure gauges designed for pressure measurement of liquid and gaseous media. These units have a size diameter of 63 mm, range marked in bar and are fully manufactured in stainless steel.

### MAIN FEATURES

Compact full stainless steel construction.  
Wetted parts in AISI 316L / 1.4435 – flush diaphragm.  
Designed according to EN 837-1.  
Bayonet lock case with blow-out.  
Suitable to be filled with glycerine.

### STANDARD SURFACE FINISH

Wetted parts:  $\leq 0,76 \mu\text{m Ra}$  – SF3.

OPTIONS: Electropolished  $\leq 0,38 \mu\text{m Ra}$  (SF4) wetted parts.  
High temperature design on request.

USE: Gases and liquids compatible with the construction.

AVAILABLE MODELS: SMAN-63R – radial connection.  
SMAN-63A – axial connection.

SIZES: 3/4".


CONNECTIONS: ASME BPE clamp ferrules.  
Others on request.

MEASURING RANGES: 0 to 4 bar, 0 to 6 bar, 0 to 10 bar and 0 to 16 bar.




LIMITING CONDITIONS	
Accuracy	$\pm 2,5\%$ FS
IP rating	IP 65
Maximum allowable pressure	Full scale reading
Maximum operating temperature	120 °C *
Minimum operating temperature	-20 °C
Ambient temperature	-10 to 60 °C

\* 150 °C for short term (cleaning). Other limits on request.

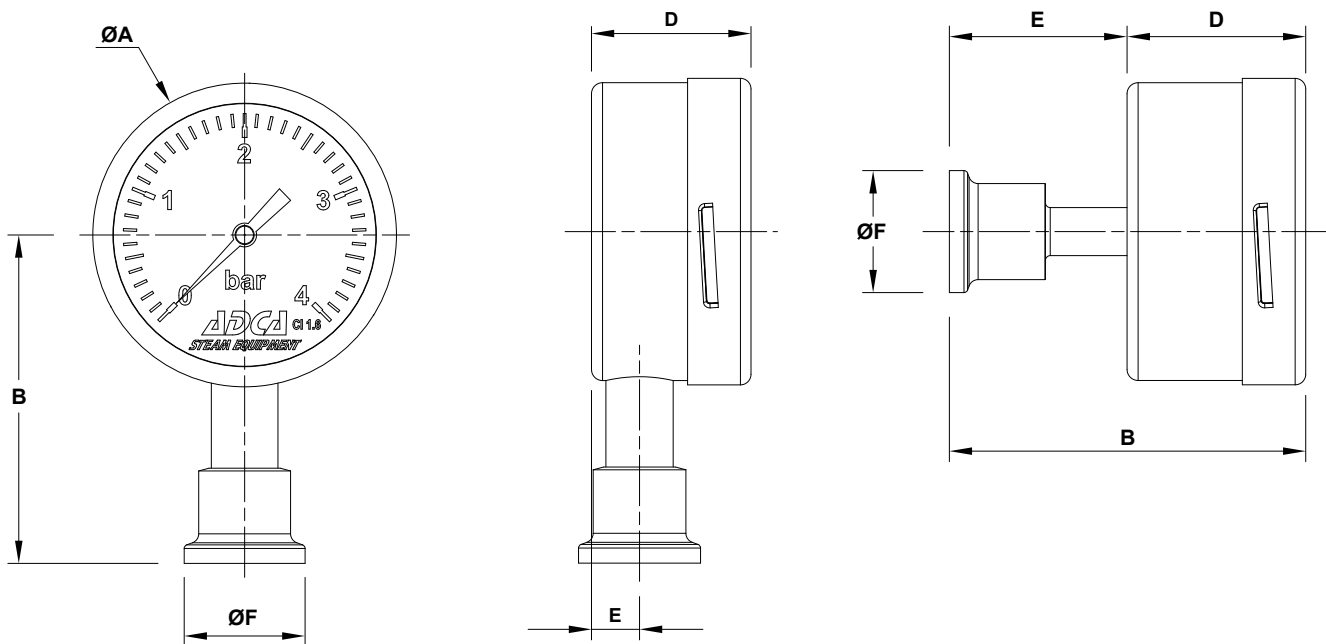

DIMENSIONS (mm)						
MODEL	$\varnothing A$	B	D	E	$\varnothing F$	WEIGHT (kg)
SMAN-63R	63,8	69	33,2	10	25,4	0,2
SMAN-63A	63,8	74,2	37,2	37	25,4	0,4

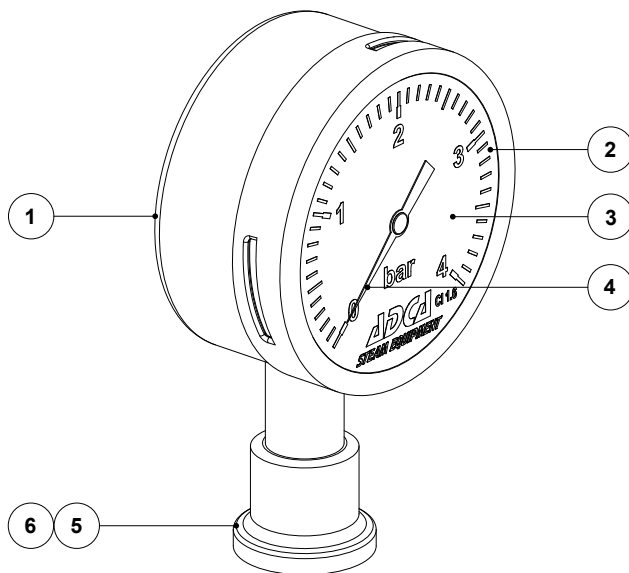

MATERIALS		
POS. N°	DESIGNATION	MATERIAL
1	Case and bezel ring	AISI 304 / 1.4301
2	Window	Glass
3	Dial	White aluminium
4	Pointer	Black aluminium
5	Connection	AISI 316L / 1.4435
6	Measuring system	AISI 316L / 1.4435